





TRACTOR THREE-POINT HITCH M1-1203

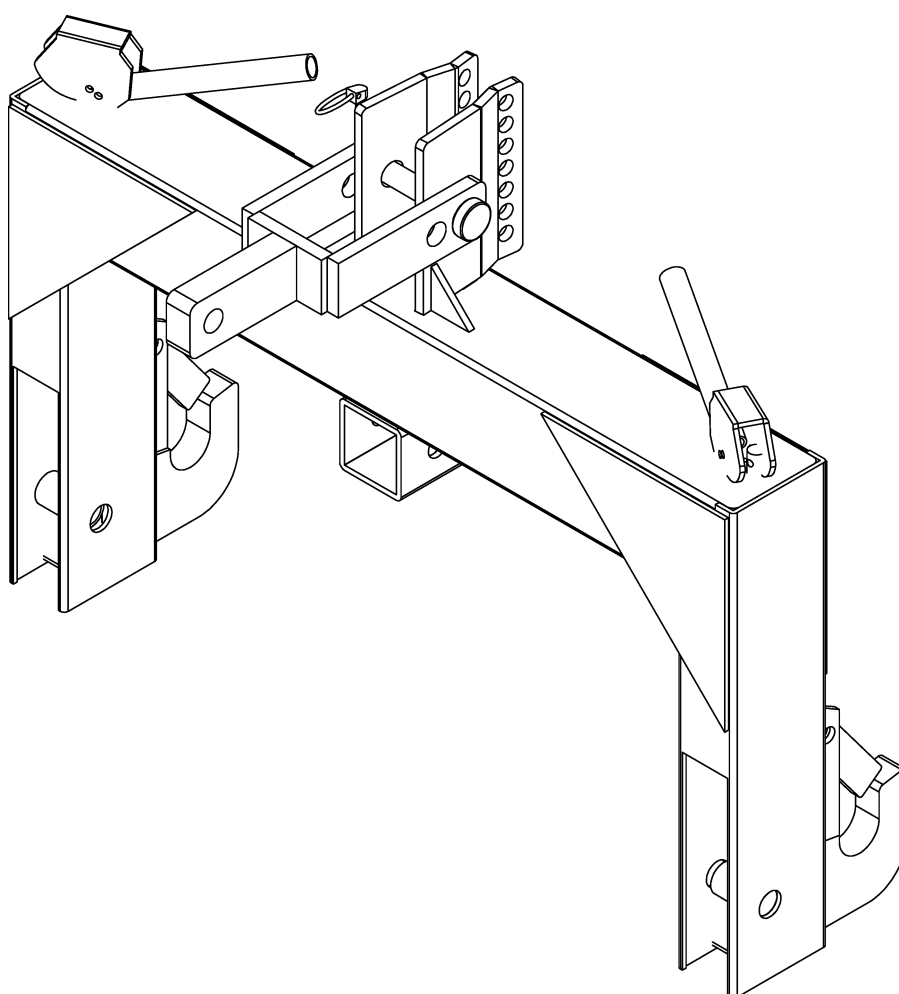

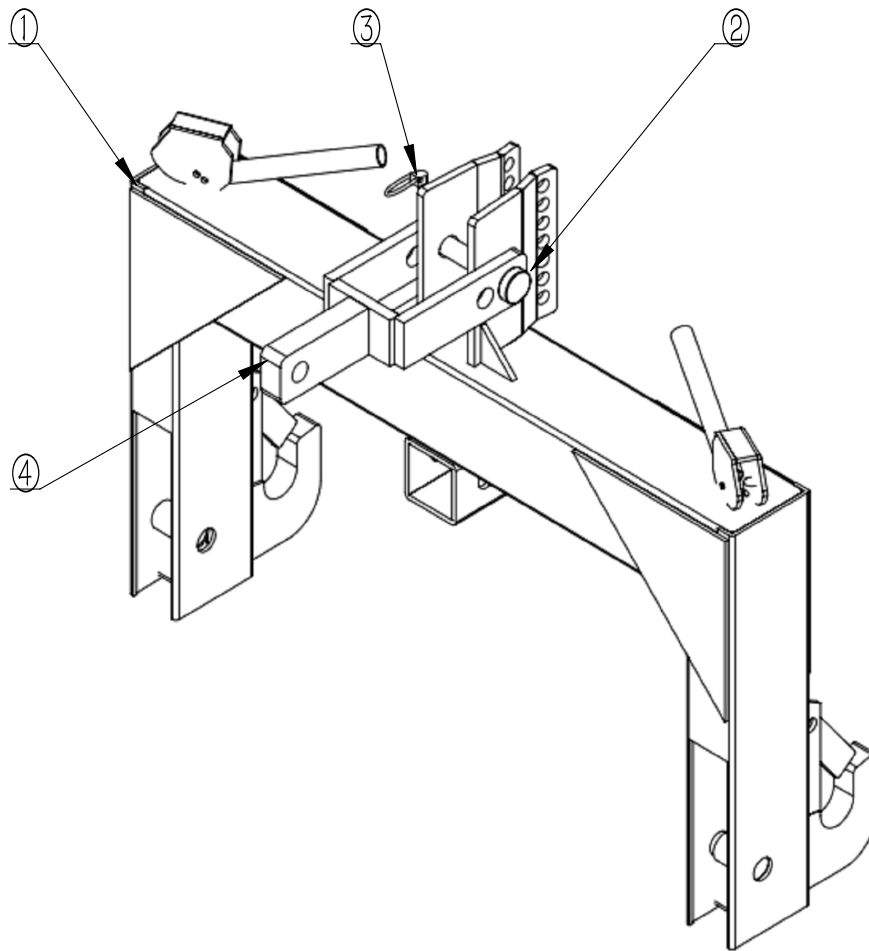

Part#	Description	QTY
①	Main Frame	1
②	Top Link Pin	1
③	O-Pin	1
④	Connector	1

● ASSEMBLY INSTALLATION

Note: It is recommended that two people assist when connecting this product.

1. Fasten the Hitch to the tractor's lift arms using a Bracket with Clevis Pin on each end. Secure with R- Pins. **See Figure A.**
2. Fasten the tractor's top link to the Top Bracket with the Top Link Pin (2).
3. Adjust the height of the Top Hook and connect it to the implement with a link pin (not included).
4. Insert the implement's lower mounts inside the Lower Hooks, and lock by pressing down the latch handles.
5. Check that all connections are tight before starting the work task.
6. If the tractor has stabilizer arms, they will not fit into the Hitch mounting area along with the lift arms. Use stabilizer chains, or some other longer mounting pin (neither included) to fasten the Hitch to the tractor.

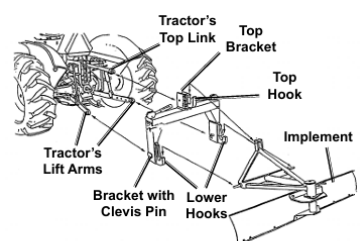


Figure A